Quick Setup Guide

To register this product please visit
www.samsung.com/register.

BN68-07044S-00

List of Parts

➢ The provided accessories may vary depending on the model.

❶ Remote Control & Batteries (AAA x 2)
❷ Power Cord
❸ Holder-Wire Stand
❹ QSG Safety Guide
❺ Hotel Mount Kit (40” 48” include)
❻ Screw

Installing the LED TV Stand

♦ **HG40/48AD690D**

Components

When installing the stand, use the provided components and parts.

1

40/48 inch: M4 X L12



2



✎ Place a soft cloth over a table to protect the TV, and then place the TV on the cloth screen side down.
✎ Insert the Stand Guide into the slot on the bottom of the TV.

3

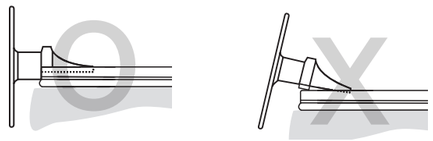

4

HG40AD690
HG48AD690

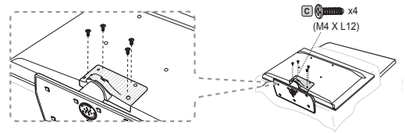

Hotel Mount Kit

Short Bolt (2EA)	Long Bolt (2EA)	Nut (2EA)	Washer (2EA)	Bolt + Nut



Affix the stand to a flat surface such as a dresser top, desk top, or entertainment center as shown.

WARNING: To prevent injury, this apparatus must be securely attached to the floor/ table in accordance with the installation instructions.

Viewing the Connection Panel

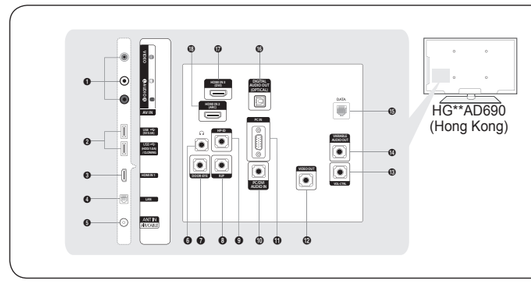

➢ The product connection panel may vary depending on the model.

❶ AV IN
❷ USB(5V 0.5A) USB(HDD 1.0A) / CLONING
❸ HDMI IN1
❹ LAN
❺ ANT IN(AIR/CABLE)
❻ HEADPHONE JACK
❼ DOOR-EYE
❽ RJP
❾ HP-ID
❿ PC/DVI AUDIO IN
⓫ PC IN
⓬ VIDEO OUT
⓭ VOL-CTRL
⓮ VARIABLE AUDIO OUT
⓯ DATA
⓰ DIGITAL AUDIO OUT (OPTICAL)
⓱ HDMI IN 3 (DVI)
⓲ HDMI IN 2 (ARC)

Connecting through the Variable Output

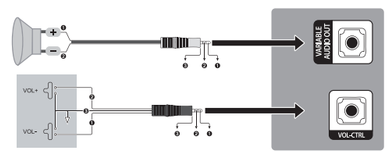

Hospitality Plug & Play

Hotel Plug & Play is a function that automatically performs the Hotel mode selection, Local Set and Picture mode Setup once.

– Hotel Plug & Play is available only one time when power is first turned ON.
– After setting up first TV and Clone TV to USB
– Next TV only needs to exit Hotel Plug & Play, connect USB, then Clone USB to TV.
– Depending on model and region, some menu may NOT exist.

♦ **UI Scenario**

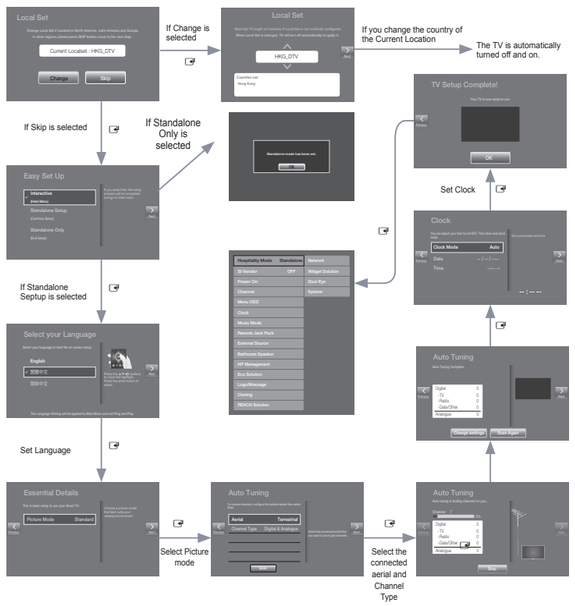

Wall Mount Kit Specifications (VESA)

Install your wall mount on a solid wall perpendicular to the floor. When attaching to other building materials, please contact your nearest dealer. If installed on a ceiling or slanted wall, TV may fall and result in severe personal injury.

➢ Standard dimensions for wall mount kits are shown in the table below.
➢ Samsung wall mount kits contain a detailed installation manual. All parts necessary for assembly are provided.
➢ Do not use screws that do not comply with the VESA standard screw specifications.
➢ Do not use screws that are longer than the standard dimension or do not comply with the VESA standard screw specifications. Screws that are too long may cause damage to the inside of the TV set.
➢ For wall mounts that do not comply with the VESA standard screw specifications, the length of the screws may differ depending on the wall mount specifications.
➢ Do not fasten the screws too firmly. This may damage the product or cause the product to fall, leading to personal injury. Samsung is not liable for these kinds of accidents.
➢ Samsung is not liable for product damage or personal injury when a non- VESA or non-specified wall mount is used or the consumer fails to follow the product installation instructions.
➢ Do not mount the TV at more than a 15 degree tilt.
➢ Always have two people mount the TV on a wall.

Product Family	TV size in inch	VESA screw hole specs (A * B) in millimeters	Standard Screw	Quantity
HD690	40 inch	200 x 200	M8	4
	48 inch	400 x 400		



Do not install your Wall Mount Kit while your TV is turned on.
It may result in personal injury due to electric shock.

Licence

DOLBY DIGITAL PLUS — Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.

dts Premium Sound | 5.1 — Manufactured under a license from U.S. Patent No’s: 5,956,674, 5,974,380, 5,978,762, 6,487,535, 6,226,616, 7,212,872, 7,003,467, 7,272,567, 7,668,723, 7,392,195, 7,930,184, 7,333,929 and 7,548,853. DTS, the Symbol, and DTS and the Symbol together are registered trademarks & DTS Premium Sound is a trademark of DTS, Inc. ©2012 DTS, Inc. All Rights Reserved.

dts Studio Sound — Manufactured under a license from U.S. Patent No’s: 6,285,767, 8,027,477, 5,319,713, 5,333,201, 5,638,452, 5,771,295, 5,970,152, 5,912,976, 7,200,236, 7,492,907, 8,050,434, 7,720,240, 7,031,474, 7,907,736 and 7,764,802. DTS, the Symbol, and DTS and the Symbol together are registered trademarks & DTS Studio Sound is a trademark of DTS, Inc. ©2012 DTS, Inc. All Rights Reserved.

HDMI — The terms HDMI and HDMI High-Defi nition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

DIVX HD — DivX Certified® to play DivX® video up to HD 1080p, including premium content.

ABOUT DIVX VIDEO: DivX® is a digital video format created by DivX, LLC, a subsidiary of Rovi Corporation. This is an official DivX Certified® device that has passed rigorous testing to verify that it plays DivX video. Visit divx.com for more information and software tools to convert your files into DivX videos.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified® device must be registered in order to play purchased DivX Video-on-Demand (VOD) movies.

To obtain your registration code, locate the DivX VOD section in your device setup menu. Go to vod.divx.com for more information on how to complete your registration.

DivX®, DivX Certified® and associated logos are trademarks of Rovi Corporation or its subsidiaries and are used under license.

Covered by one or more of the following U.S. patents: 7,295,673; 7,460,668; 7,515,710; 7,519,274

Open Source License Notice

Open Source used in this product can be found on the following webpage. (http://opensource.samsung.com)

Open Source License Notice is written only English.

Specifications

Items		Specification	Comment
TV System		PAL, NTSC, DTMB	
Audio out	Speaker out	10W x 2	
	Variable Audio	4W mono 8 ohm SPK	Phone Jack output BTL Sound output
Video out		Video Jack	
Input	AV	Video, Audio-L/R	
	PC	D-sub, Audio-L/R	
	HDMI	Compatible with the HDMI Specifications	
	Antenna	75ohm Unbalance, Din Jack	
Data	DATA	RJ-12	
	RJP	RS232	
Operating temperature		10°C ~ 40°C (50°F ~ 104°F)	
Operating Humidity		10% ~ 80%	non-condensing
Storage Temperature		-20°C ~ 45°C (-4°F ~ 113°F)	
Storage Humidity		5% ~ 95%	non-condensing

➢ Design and specifications are subject to change without prior notice.
➢ For the power supply and Power Consumption, refer to the label attached to the product.

SAMSUNG

Contact SAMSUNG WORLDWIDE

If you have any questions or comments relating to Samsung products, please contact the SAMSUNG customer care centre.

Country	Customer Care Centre ☎
HONG KONG	(852) 3698 4698